

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-171163

(43)Date of publication of application : 14.06.2002

(51)Int.Cl.

H03K 17/78

(21)Application number : 2000-365030

(71)Applicant : SUNX LTD

(22)Date of filing : 30.11.2000


(72)Inventor : KITO SHINOBU
OKANO NOBUYUKI

(54) PHOTOELECTRIC SENSOR

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a photoelectric sensor which enables stable detection independently of a supplied power source voltage while restraining a consumption current of the whole circuit.

SOLUTION: A projecting and receiving light circuit is constituted by connecting a light projecting element 10, a power source part 30 and a light receiving circuit 40 in series between a power source input terminal 1 and a ground terminal 2. A constant current circuit 20 is connected in series with the light projecting element 10 between the power source input terminal 1 and the power source part 30. Since the light projecting element 10 is connected in series with the light receiving circuit 40, a consumption current of the whole circuit can be restrained. The light projecting element 10 is driven by a prescribed constant current by the constant current circuit 20 independently of a power source voltage, so that the amount of a projection light is stabilized. Thereby stable detection is enabled while restraining the consumption current of the whole circuit.

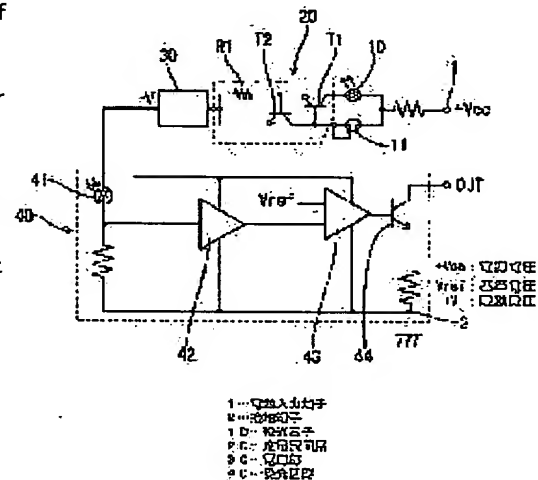

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

JAPANESE

[JP,2002-171163,A]

CLAIMS DETAILED DESCRIPTION TECHNICAL FIELD PRIOR ART EFFECT OF THE INVENTION TECHNICAL
PROBLEM MEANS DESCRIPTION OF DRAWINGS DRAWINGS

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.*** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] A photoelectrical sensor characterized by having arranged a current regulator circuit which supplies constant current to said floodlighting element between said power supply input terminals and said constant-voltage sections to said floodlighting element and serial in a photoelectrical sensor which comes to carry out series connection of the constant-voltage section which supplies power of a constant voltage between a power supply input terminal and an earth terminal in a floodlighting element, a light-receiving circuit, and said light-receiving circuit.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[0001]

[The technical field to which invention belongs] This invention relates to the photoelectrical sensor which comes to carry out series connection of a floodlighting element, a light-receiving circuit, and the constant-voltage section that supplies the power of a constant voltage to a light-receiving circuit between a power supply input terminal and an earth terminal.

[0002]

[Description of the Prior Art] The light-receiving circuit is connected with the floodlighting element to DC power supply at the serial like JP,4-2131,U in the photoelectrical sensor of the conventional two-wire system (refer to drawing 3). By this, since it becomes unnecessary to supply current to each of a floodlighting element and a light-receiving circuit, the consumed electric current of the whole circuit can be reduced.

[0003]

[Problem(s) to be Solved by the Invention] Generally by the photoelectrical sensor, fixed width of face called 12-24V is given to the tolerance of supply voltage. However, with the above-mentioned conventional configuration, since the inrush currents to a circuit differ if supply voltage differs as a result, the floodlighting current supplied to a floodlighting element will also differ according to supply voltage. For this reason, the amount of floodlighting will change with supply voltage, and there was a defect that stable detection could not be performed.

[0004] This invention was made in view of the above-mentioned situation, and the purpose is in the place which offers the photoelectrical sensor which can perform detection stabilized irrespective of the supply voltage supplied, stopping the consumed electric current of the whole circuit.

[0005]

[Means for Solving the Problem] In order to attain the above-mentioned purpose, the photoelectrical sensor concerning invention of claim 1 has the feature at the place which has arranged a current regulator circuit which supplies constant current to said floodlighting element between said power supply input terminals and said constant-voltage sections to said floodlighting element and serial in the photoelectrical sensor which comes to carry out series connection of the constant-voltage section which supplies power of a constant voltage between a power supply input terminal and an earth terminal in a floodlighting element, a light-receiving circuit, and said light-receiving circuit.

[0006]

[Function and Effect of the Invention] According to the configuration of <invention of claim 1> claim 1, since a light-receiving circuit is connected with a floodlighting element at a serial, the consumed electric current of the whole circuit can be stopped compared with what carried out parallel connection. Here, since a floodlighting element is driven in a current regulator circuit and it is driven according to predetermined floodlighting current irrespective of supply voltage, the amount of floodlighting is stabilized by it. The stable detection is attained this stopping the consumed electric current of the whole circuit.

[0007]

[Embodiment of the Invention] Drawing 1 and drawing 2 explain the operation gestalt of this invention. As shown in drawing 1, series connection of the floodlighting element 10 which consists of LED, a power supply section 30, and the light-receiving circuit 40 is carried out between the power supply input terminal 1 and an earth terminal 2, and a photoelectrical sensor is constituted between, and is equipped with the light emitting/receiving circuit which has arranged the current regulator circuit 20 to the floodlighting element 10 and the serial among the power supply input terminal 1 and power supply section 30.

[0008] Parallel connection of FET11 is carried out to the floodlighting element 10. Irrespective of load voltage (drain-source voltage), this thing operates so that almost fixed drain current may be passed to a current regulator circuit 20. The current regulator circuit 20 is constituted by two transistors T1 and T2 and resistance R1. If the drain current of FET11 flows at the base, a transistor T1 incorporates collector current from the output terminal of the floodlighting element 10, and it is connected so that an emitter current may be passed to resistance R1. On the other hand, if the emitter current of a transistor T1 flows at the base, a transistor T2 incorporates a part of drain current from FET11 as collector current, and it is connected so that an emitter current may be passed to a power supply section 30.

[0009] A power supply section 30 is the so-called voltage stabilizer, and, regardless of the voltage of a power

supply, supplies the power of a predetermined voltage value to the light-receiving circuit 40 (photo detector) etc. 5V are supplied as driver voltage for specifically driving electronic parts, such as a transistor. The light-receiving circuit 40 consists of the photo detector 41 which consists of a photodiode, an op amplifier 42, a comparator 43, and an output transistor 44. Among those, the photo detector 41 is arranged between the output terminal of a power supply section 30, and the earth terminal 2. To the op amplifier 42, the output terminal of said photo detector 41 is connected to the input terminal, and the input terminal of a comparator 43 is connected to the output terminal. The output terminal of a comparator 43 is connected with the output transistor 44.

[0010] An operation of the photoelectrical sensor by the above-mentioned configuration is explained. If supply voltage V_{cc} is supplied to a light emitting/receiving circuit, the floodlighting element 10 will emit light. And the light received by the photo detector 41 among the light is amplified by the op amplifier 42 as a light-receiving signal according to the quantity of light, and is compared with reference voltage V_{ref} by the comparator 43. Here, reference voltage V_{ref} is set as light-receiving signal level in case for example, a detection body does not exist. Therefore, when there is no detection body, the output transistor 44 is not driven. However, when a detection body exists, the quantity of light received by the photo detector 41 will decrease, light-receiving signal level will fall from reference voltage V_{ref} , and a comparator 43, as a result the output transistor 44 will drive. In addition, reference voltage V_{ref} can be made by another power circuit which is not illustrated based on the output of said power supply section 30.

[0011] Here, in a current regulator circuit 20, since the potential of the both ends of resistance $R1$ turns into the potential V_{be} between the base emitters of a transistor $T2$, the current I_r ($V_{be}/R1$) of immobilization flows irrespective of supply voltage. Since the base current of a transistor $T2$ is very small, it can be considered that the emitter current and said current I_r of a transistor $T1$ are an EQC. Since base current is very small also in a transistor $T1$, collector current and an emitter current become almost equivalent. Therefore, the floodlighting current which flows for the floodlighting element 10 turns into the collector current = emitter current = current I_r ($V_{be}/R1$) of a transistor $T1$, and serves as the fixed amount of current irrespective of supply voltage V_{cc} . In addition, as shown in drawing 2, even if it connects a floodlighting element to a serial to FET11, the same effect as the above is done so.

[0012] Thus, since the light-receiving circuit 40 is connected with the floodlighting element 10 at a serial, the consumed electric current of the whole circuit can be stopped. And since the floodlighting element 10 is driven with predetermined fixed current by the current regulator circuit 20 irrespective of supply voltage, the amount of floodlighting is stabilized by it. It becomes possible to perform stable detection, this stopping the consumed electric current of the whole circuit.

[0013] It is not limited to said operation gestalt and an operation gestalt which is explained below is also included in the technical range of this invention, and further, within limits which do not deviate from a summary besides the following, operation gestalt > this invention besides < can be changed variously, and can be carried out.

(1) With the above-mentioned operation gestalt, although the current regulator circuit 20 was constituted from transistors $T1$ and $T2$ and resistance $R1$, it may not be restricted to this, for example, may be a current regulator circuit by IC (operational amplifier), and a current regulator circuit by zener diode.

[0014] (2) Although [the above-mentioned operation gestalt] the floodlighting element 10 emits light on the fixed current by the current regulator circuit 20, even if it is the case where pulse lighting is carried out by the switching circuit, do so the effect made into the purpose of this invention, for example.

[Translation done.]

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開2002-171163

(P2002-171163A)

(43) 公開日 平成14年6月14日 (2002.6.14)

(51) Int.Cl.⁷

H 0 3 K 17/78

識別記号

F I

H 0 3 K 17/78

テーマコード (参考)

Q 5 J 0 5 0

審査請求 未請求 請求項の数 1 O L (全 4 頁)

(21) 出願番号 特願2000-365030 (P2000-365030)

(22) 出願日 平成12年11月30日 (2000.11.30)

(71) 出願人 000106221

サンクス株式会社

愛知県春日井市牛山町2431番地の1

(72) 発明者 鬼頭 忍

愛知県春日井市牛山町2431番地の1 サンクス株式会社内

(72) 発明者 岡野 信之

愛知県春日井市牛山町2431番地の1 サンクス株式会社内

(74) 代理人 100096840

弁理士 後呂 和男 (外1名)

Fターム (参考) 5J050 AA03 BB16 DD04 EE13 EE17


EE31 EE35 FF04 FF10

(54) 【発明の名称】 光電センサ

(57) 【要約】

【課題】 回路全体の消費電流を抑えつつ、供給される電源電圧にかかわらず安定した検出を行うことが可能な光電センサを提供する。

【解決手段】 投受光回路は、電源入力端子1と接地端子2との間に、投光素子10と、電源部30と、受光回路40とを直列接続して構成され、その電源入力端子1と電源部30の間に、定電流回路20を投光素子10と直列に配置してある。投光素子10と受光回路40が直列に接続されるから、回路全体の消費電流を抑えることができる。しかも投光素子10は電源電圧にかかわらず定電流回路20により所定の一定電流で駆動されるので投光量が安定する。これにより回路全体の消費電流を抑えつつ、安定した検出を行うことが可能になる。

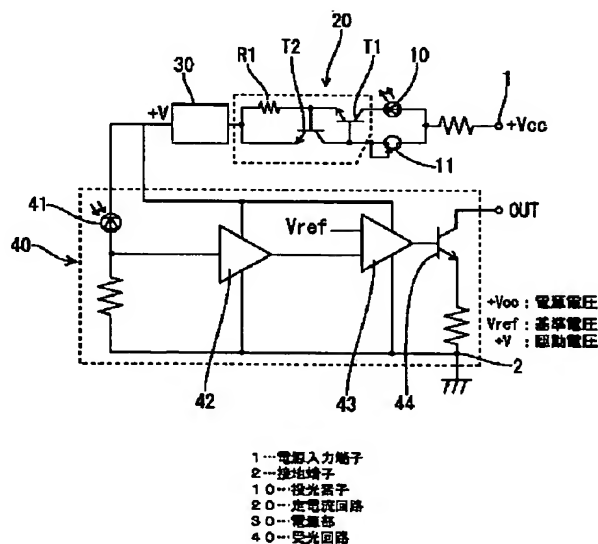

【特許請求の範囲】

【請求項 1】 電源入力端子と接地端子との間に、投光素子と、受光回路と、前記受光回路へ定電圧の電力を供給する定電圧部とを直列接続してなる光電センサにおいて、前記電源入力端子と前記定電圧部の間に、前記投光素子へ定電流を供給する定電流回路を前記投光素子と直列に配置したことを特徴とする光電センサ。

【発明の詳細な説明】**【0001】**

【発明の属する技術分野】 本発明は、電源入力端子と接地端子との間に、投光素子と、受光回路と、受光回路へ定電圧の電力を供給する定電圧部とを直列接続してなる光電センサに関する。

【0002】

【従来の技術】 従来の 2 線式の光電センサは、実開平 4-2131 号などのように直流電源に対して投光素子と受光回路が直列に接続されている (図 3 参照)。これによって、投光素子と受光回路のそれぞれに電流を供給する必要がなくなるので、回路全体の消費電流を低減することができ

【0003】

【発明が解決しようとする課題】 一般に光電センサでは、電源電圧の許容範囲に例えば 1.2~2.4V という一定の幅を持たせてある。しかし、上述の従来構成では、電源電圧が異なると回路への流入電流が異なってしまうので、ひいては投光素子へ供給される投光電流も電源電圧に応じて異なることになる。このため電源電圧によって投光量が異なることになり、安定した検出が行えないという欠点があった。

【0004】 本発明は、上記事情に鑑みてなされたもので、その目的は、回路全体の消費電流を抑えつつ、供給される電源電圧にかかわらず安定した検出を行うことが可能な光電センサを提供するところにある。

【0005】

【課題を解決するための手段】 上記目的を達成するため、請求項 1 の発明に係る光電センサは、電源入力端子と接地端子との間に、投光素子と、受光回路と、前記受光回路へ定電圧の電力を供給する定電圧部とを直列接続してなる光電センサにおいて、前記電源入力端子と前記定電圧部の間に、前記投光素子へ定電流を供給する定電流回路を前記投光素子と直列に配置したところに特徴を有する。

【0006】

【発明の作用及び効果】 <請求項 1 の発明> 請求項 1 の構成によれば、投光素子と受光回路が直列に接続されるので、並列接続したものに比べて回路全体の消費電流を抑えることができる。ここで、投光素子は定電流回路で駆動されるので電源電圧にかかわらず所定の投光電流によって駆動されるから、投光量が安定する。これにより

回路全体の消費電流を抑えつつ、安定した検出が可能になる。

【0007】

【発明の実施の形態】 本発明の実施形態を図 1 及び図 2 によって説明する。光電センサは、図 1 に示すように、電源入力端子 1 と接地端子 2 との間に、例えば LED からなる投光素子 10 と、電源部 30 と、受光回路 40 とを直列接続して構成され、その電源入力端子 1 と電源部 30 の間に、定電流回路 20 を投光素子 10 と直列に配置した投受光回路を備えたものである。

【0008】 投光素子 10 には、FET 11 が並列接続されている。このものは負荷電圧 (ドレイン-ソース電圧) にかかわらずほぼ一定のドレイン電流を定電流回路 20 に流すように動作する。定電流回路 20 は、2 つのトランジスタ T1、T2 と抵抗 R1 によって構成されている。トランジスタ T1 は、FET 11 のドレイン電流がベースに流れると、投光素子 10 の出力端子からコレクタ電流を取り込み、抵抗 R1 へエミッタ電流を流すように接続されている。一方、トランジスタ T2 は、そのベースにトランジスタ T1 のエミッタ電流が流れると、FET 11 からのドレイン電流の一部をコレクタ電流として取り込み、電源部 30 へとエミッタ電流を流すように接続されている。

【0009】 電源部 30 は、いわゆる定電圧回路であって、電源の電圧に関係なく、所定の電圧値の電力を受光回路 40 (受光素子) などに供給する。具体的にはトランジスタなどの電子部品を駆動するための駆動電圧として、例えば 5V を供給する。受光回路 40 は、例えばフォトダイオードからなる受光素子 41 と、OP アンプ 42 と、コンパレータ 43 と、出力トランジスタ 44 とからなる。そのうち受光素子 41 は電源部 30 の出力端子と接地端子 2 との間に配置されている。OP アンプ 42 に対しては、その入力端子には前記受光素子 41 の出力端子が接続され、その出力端子にはコンパレータ 43 の入力端子が接続されている。コンパレータ 43 の出力端子は、出力トランジスタ 44 と接続されている。

【0010】 上記構成による光電センサの作用について説明する。投受光回路に電源電圧 V_{cc} が供給されると投光素子 10 が発光する。そしてその光のうち、受光素子 41 にて受光された光は、その光量に応じた受光信号として OP アンプ 42 で増幅され、コンパレータ 43 にて基準電圧 V_{ref} と比較される。ここでは、基準電圧 V_{ref} は、例えば検出物体が存在しないときの受光信号レベルに設定されている。従って、検出物体がないときには出力トランジスタ 44 は駆動しない。ところが、検出物体が存在するときには、受光素子 41 にて受光される光量が減少して、受光信号レベルが基準電圧 V_{ref} よりも低下してコンパレータ 43 ひいては出力トランジスタ 44 が駆動することになる。なお、基準電圧 V_{ref} は、例えば前記電源部 30 の出力にもとづいて図示

【 0 0 1 1 】 ここで、定電流回路 2 0 において、抵抗 R 1 の両端の電位はトランジスタ T 2 のベースエミッタ間の電位 V_{be} になるので、電源電圧にかかわらず固定の電流 $I_r (V_{be}/R 1)$ が流れる。トランジスタ T 2 のベース電流はきわめて小さいので、トランジスタ T 1 のエミッタ電流と前記電流 I_r は同等と見なせる。トランジスタ T 1 においてもベース電流はきわめて小さいので、コレクタ電流とエミッタ電流はほぼ同等となる。したがって投光素子 1 0 に流れる投光電流はトランジスタ T 1 のコレクタ電流＝エミッタ電流＝電流 $I_r (V_{be}/R 1)$ となり、電源電圧 V_{cc} にかかわらず一定の電流量となる。なお、図 2 に示すように、投光素子を FET 1 1 に対して直列に接続したものであっても上記と同様の効果を奏する。

【００１２】このように、投光素子１０と受光回路４０が直列に接続されるから、回路全体の消費電流を抑えることができる。しかも投光素子１０は電源電圧にかかわらず定電流回路２０により所定の一定電流で駆動されるので投光量が安定する。これにより回路全体の消費電流を抑えつつ、安定した検出を行うことが可能になる。

下記以外にも要旨を逸脱しない範囲内で種々変更して実施することができる。

(1) 上記実施形態では、定電流回路 20 はトランジスタ T1、T2 と抵抗 R1 とから構成したが、これに限られず、例えば、IC (オペアンプ) による定電流回路や、ツェナーダイオードによる定電流回路であっても良い。

【００１４】（２）上記実施形態では、投光素子１０は定電流回路２０による一定電流に発光するとしたが、例えば、スイッチ回路によりパルス点灯させる場合であっても本発明の目的とする効果を奏する。

【図 1】本発明の一実施形態に係る光電センサの投受光回路図

【図2】その等価回路図

【図3】従来の光電センサの投受光回路図

【符号の説明】

1…電源入力端子

2…接地端子


10...投光素子

20…定電流回路

30…電源部

4 0...受光回路

【図2】

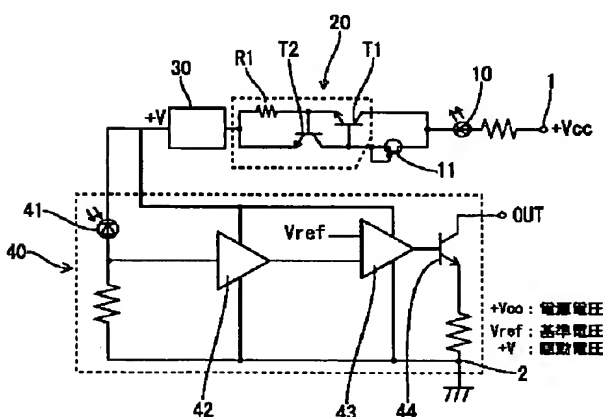

- 1...電圧入力端子
- 2...接地端子
- 10...投光素子
- 20...定電流回路
- 30...電圧部
- 40...受光回路

(4)

特開 2002-171163

【図 3】

